

Bitumen membrane refurbishment and protection based on the HYPERDESMO® System

The exposure of old bitumen membranes to intense elements such as fluctuating temperatures, UV radiation and rain, often results in their aging and inevitably the creation of leaks that lead to substrate corrosion. The HYPERDESMO® System offers a unique solution that allows to restore watertightness without having to remove the bitumen membranes.

1 DETAILS TREATMENT & REPAIRS

HYPERDESMO®-PB-1K

2 PRIMING

UNIVERSAL PRIMER-2K-4060

3 WATERPROOFING (1st coat)

HYPERDESMO® System

4 REINFORCEMENT WITH GEOTEXTILE

GEOTEXTILE
50 PRESSED or 45 PRESSED


5 WATERPROOFING (2nd coat)

HYPERDESMO® System

6 TOP COAT APPLICATION

HYPERDESMO®-ADY-E

The HYPERDESMO® System may be used for the waterproofing protection and refurbishment while providing high UV reflectance, high elasticity and crack bridging even at low temperatures.

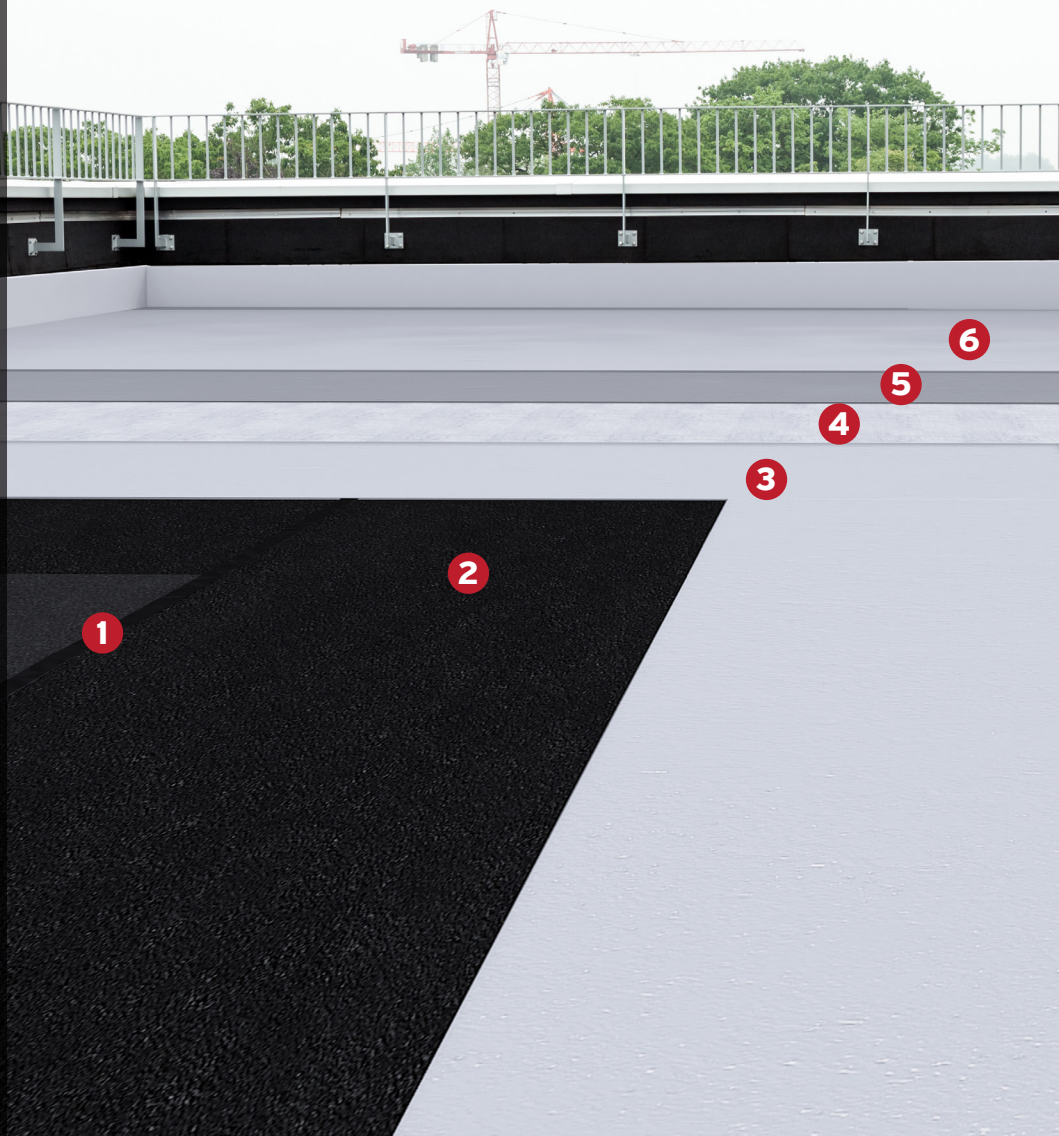

PRODUCTS



HYPERDESMO®-PB-1K



UNIVERSAL PRIMER-
2K-4060



HYPERDESMO® System



GEOTEXTILE
50 PRESSED
or 45 PRESSED



HYPERDESMO®-ADY-E