

## THIXO-TOOL

### Revolutionary rheology modification additive for HYPERDESMO® range of products

#### DESCRIPTION

**THIXO-TOOL** is a unique additive developed by ALCHIMICA™ in order to solve application difficulties of **HYPERDESMO®** System range of products in severely inclined, uneven or completely vertical substrates.

The recommended addition ratio is 10-30% depending on the surface inclination, substrate condition and desired final consumption.

**THIXO-TOOL** can be used alongside **ACCELERATOR 3000A** when the use of the latter is recommended.

**THIXO-TOOL should not be used with any of the bitumen extended products in the HYPERDESMO®-PB range, one or two component.**

#### FEATURES & BENEFITS

The product is available in 1Kg plastic sausages that allow easy addition to **HYPERDESMO®** without significant loss of product.

**THIXO-TOOL** is a product that although greatly enhances the thixotropic properties of the **HYPERDESMO®** range of products, it does not affect in the slightest the final viscosity of the product.

#### RECOMMENDED FOR

Increasing the thixotropy (reducing the self-levelling characteristics) of **HYPERDESMO®** range of products.

#### For example:

- **Waterproofing and protection of PU foams.** The non-smooth final surface of the foam makes the application of standard **HYPERDESMO®** difficult, as the coverage is not homogenous. In the hills,

you will not have enough product and in the troughs, there will be an excess of material that may lead to bubbling.

- **Waterproofing of flashing details on a roof.** Usually these points need several coats of **HYPERDESMO®** in order to achieve the minimum film thickness. By using **THIXO-TOOL** the application on these points can be done in 1-2 coats maximum.
- **Waterproofing and protection of a roof where the substrate is very uneven.** As in the case of protection of PU foam mentioned earlier, when a substrate is uneven it is difficult to achieve a uniform thickness of the membrane. By using **THIXO-TOOL** you can modify the rheology of the **HYPERDESMO®** so that all areas are covered at a uniform consumption.
- **Waterproofing and protection of corrugated metal roofs.** This application may prove difficult using self-levelling products, as once again you will have uneven consumption of material. By using **THIXO-TOOL** you can modify the rheology of the **HYPERDESMO®** so that all areas are covered at a uniform consumption.

#### APPLICATION

Open the can of **HYPERDESMO®** and mix thoroughly before adding **THIXO-TOOL**. Open the sausage of **THIXO-TOOL** and empty desired amount by hand into the pail (left over material can be sealed and stored for later use).

## THIXO-TOOL

Addition of **THIXO-TOOL** depends on specific project requirements, but the recommended amounts is 10-30%.

Mix the **THIXO-TOOL** by a low speed mixer, careful not to introduce air. Apply final material as described in the Technical Data Sheet at time of purchase.

### PACKAGING

1 Kg sausages


### SHELF LIFE

12 months minimum in the original packaging when stored in dry places and at temperatures of 5-25 °C.

### TECHNICAL SPECIFICATIONS

PROPERTY	UNITS	METHOD	SPECIFICATION
-Viscosity (BROOKFIELD)	cP	ASTM D4287, at 25°C	9,000-12,000
-Density	gr/cm <sup>3</sup>	ASTM D1475 / DIN 53217 / ISO 2811, at 20°C	1.80-1.90
-Solids	%	-	100

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS. ALCHIMICA S.A. RESERVES THE RIGHT TO CHANGE AT ANY TIME THE PROPERTIES OF ITS PRODUCTS. PLEASE REFER TO THE CURRENT VERSION OF THE TECHNICAL DATA SHEET, AVAILABLE FROM OUR WEB SITE [WWW.ALCHIMICA.COM](http://WWW.ALCHIMICA.COM)

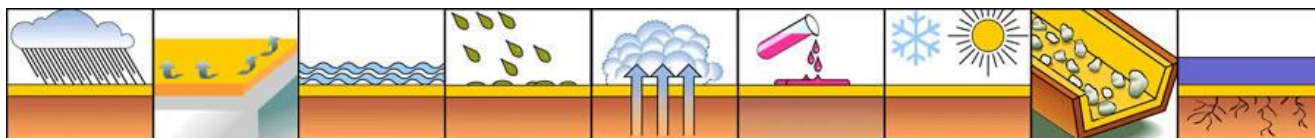

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & ISO 45001.